

CONTENTS



P21-DARB-T
**1 ct. Angle Reduction Bar
with Hardware**



P600-0070
1 ct. Universal Leg Rest




P600-0070-1
2 ct. Leg Rest Spacer



P23-SNSL
1 ct. Sling Harness




P100-0030
1 ct. Leg Rest Pad



P900-0004
**2 ct. 1/4" x 1"
Fender Steel Washer**



P900-0015
**2 ct. 1/4"-20 Hex Serrated
Flange Lock Nut**

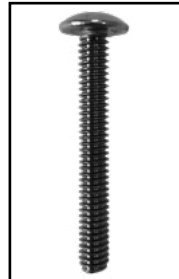

P900-004
**2 ct. 1/4"-20 x 2"
Phillips Truss M/S**

YOU WILL NEED:

Drum Key
Tape
7/16" Wrench

Phillips Screw Driver
Drill with 9/32" Bit

Please follow assembly instructions carefully to ensure optimal product performance.

Questions? Contact us at info@dynastyband.com or 1.800.558.9416.


ASSEMBLY INSTRUCTIONS

- 1**
Remove bottom drum head and hoop.
- 2**
Tape Drilling Template to outside of drum as shown below. Center "Drill Here" between tension rod casings. "Bottom of Shell" line must align with shell bearing edge to ensure holes are drilled straight up the drum.
- 3**
Drill holes in "Drill Here" circles with 9/32" drill bit.

- 4**
Install Angle Bar on tension rods.



- 5**
Install Leg Rest with Washer/Lock Nut inside shell and Spacers between Leg Rest and Shell.

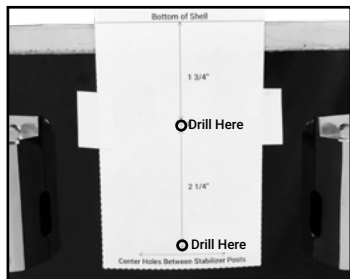

DRILLING TEMPLATE

IMPORTANT: To ensure accuracy of dimensions, print page at 100% size.

Double check inch measurements in print-out prior to drilling.

